


## EFFINGHAM, IL 62401 INSTALLATION INFORMATION, DIMENSIONS & SPECIFICATIONS

# MID JETTE (MJ) UNIT COOLER MEDIUM TEMPERATURE AIR DEFROST

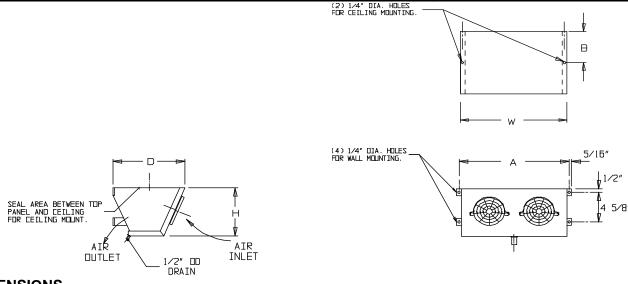

#### **DIMENSIONS**

| Model No. | Dimensions (Inches) |        |   | Mounting Hole Locations |       | Connections |         |         | Approx.<br>Ship. Wt. |
|-----------|---------------------|--------|---|-------------------------|-------|-------------|---------|---------|----------------------|
| 115 V     | Н                   | W      | D | Α                       | В     | Inlet       | Suction | Drain   | Lbs.                 |
| MJ-40     | 7                   | 13 5/8 | 8 | 13                      | 3 3/4 | 3/8" OD     | 3/8" OD | 1/2" OD | 7                    |
| MJ-70     | 7                   | 13 5/8 | 8 | 13                      | 3 3/4 | 3/8" OD     | 3/8" OD | 1/2" OD | 9                    |
| MJ-90     | 7                   | 13 5/8 | 9 | 13                      | 4 3/4 | 3/8" OD     | 3/8" OD | 1/2" OD | 10                   |
| MJ-120    | 7                   | 20 5/8 | 9 | 20                      | 4 3/4 | 3/8" OD     | 3/8" OD | 1/2" OD | 15                   |

PEERLITE protective coated coils designated by a "-P" after model number.

### **SPECIFICATIONS**

| Model No. | BTU                | J/HR               |     | Fan Dia.   | STD. Motor Amps |       |  |  |  |  |
|-----------|--------------------|--------------------|-----|------------|-----------------|-------|--|--|--|--|
| 115 V     | 10 <sup>0</sup> TD | 15 <sup>0</sup> TD | CFM | (Quantity) | 115 V           | 230 V |  |  |  |  |
| MJ-40     | 400                | 600                | 125 | 5 1/4"     | 0.65            | 0.35  |  |  |  |  |
| MJ-70     | 700                | 1050               | 125 | 51/4"      | 0.65            | 0.35  |  |  |  |  |
| MJ-90     | 900                | 1350               | 125 | 5 1/4"     | 0.65            | 0.35  |  |  |  |  |
| MJ-120    | 1200               | 1800               | 250 | 5 1/4 (2)  | 1.30            | 0.70  |  |  |  |  |
|           |                    |                    |     |            |                 |       |  |  |  |  |

Standard 115/60/1 (230/60/1 optional)

#### **GENERAL SAFETY INFORMATION**

- Only personnel qualified and familiar with this type of equipment should be responsible for the installation, service and maintenance of these units.
- 2. Disconnect all power sources prior to installing, servicing, or maintaining these units.
- All field wiring must conform to equipment requirements and all applicable national, state and municipal codes.
- 4. Reduce potential for injury by avoiding direct contact with sharp edges and coil surfaces when handling these units.

July-15

We reserve the right to make changes in design and construction at any time without notice.