



SINGLE UNIT WIRING DIAGRAM - PLPH-E SERIES.

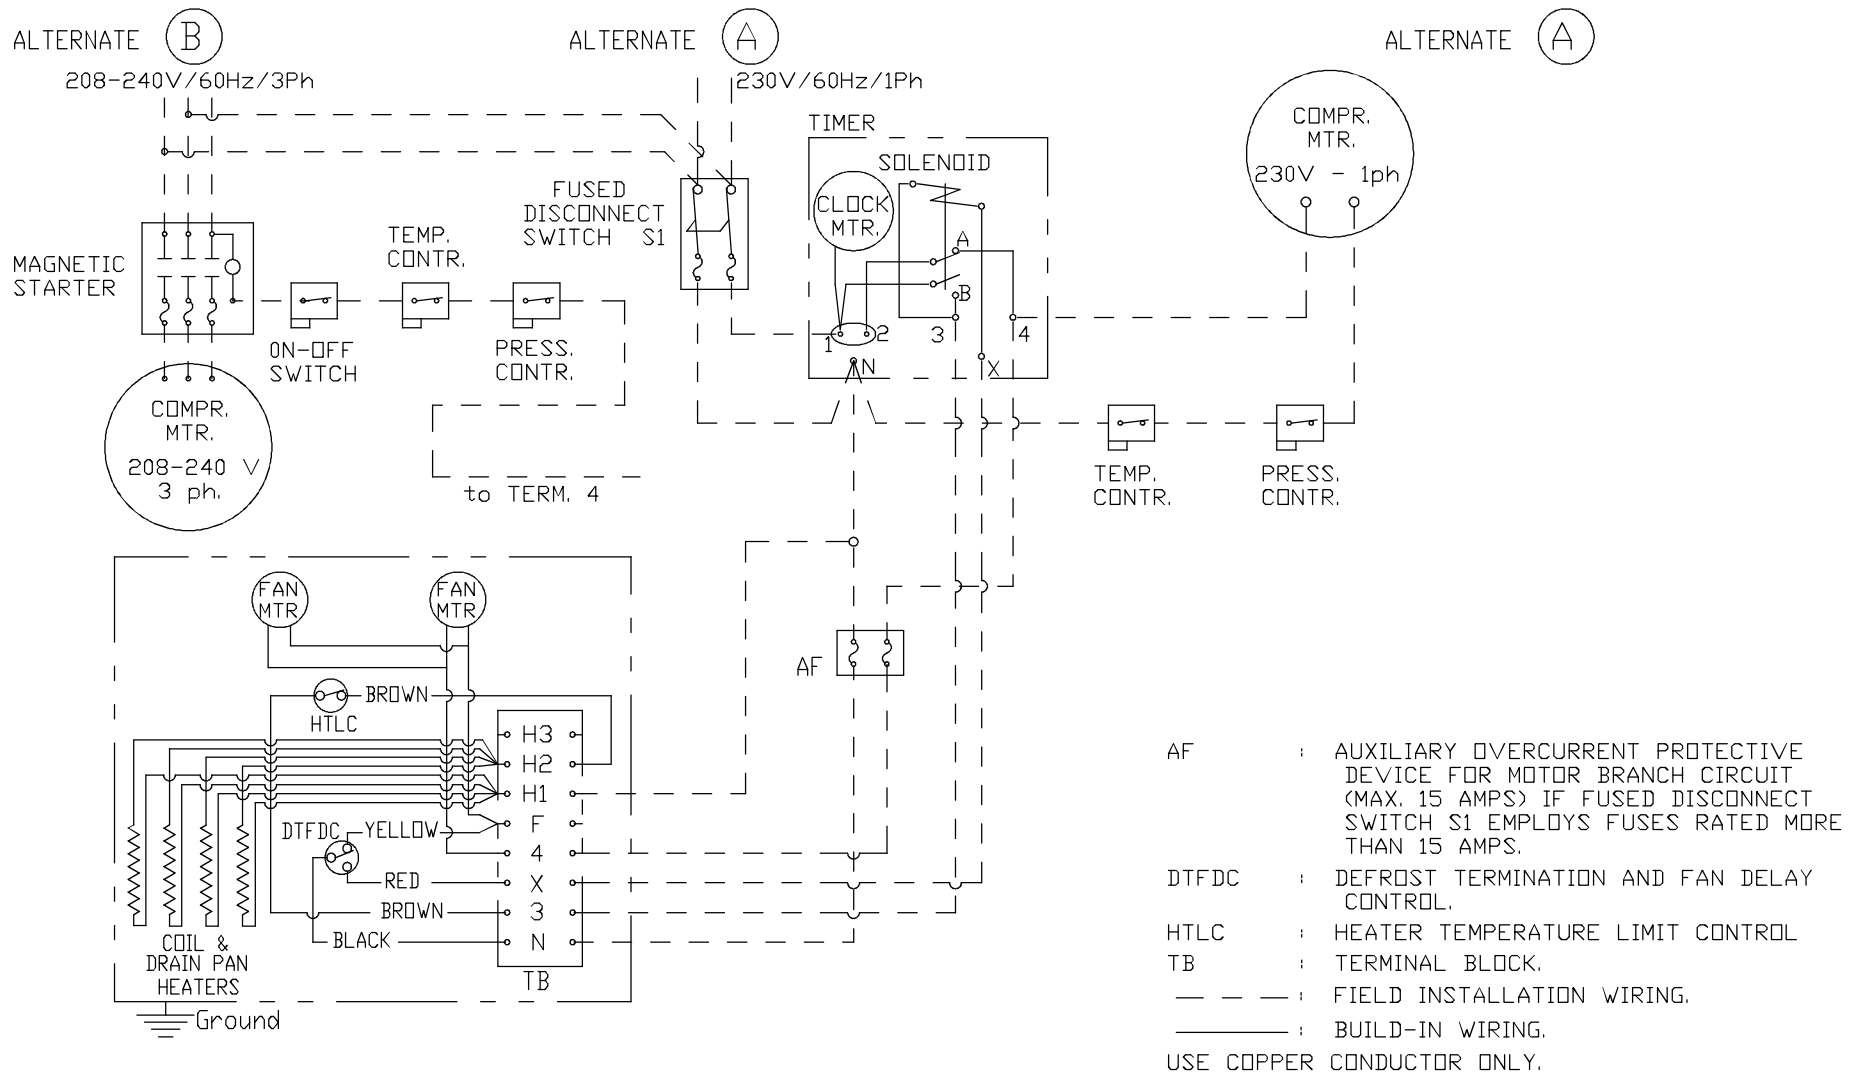

PEERLESS OF AMERICA, INC.
EFFINGHAM, IL 62401

SINGLE UNIT WIRING DIAGRAM - PLPH-E SERIES.


208-240V/60HZ/3PH HEATERS

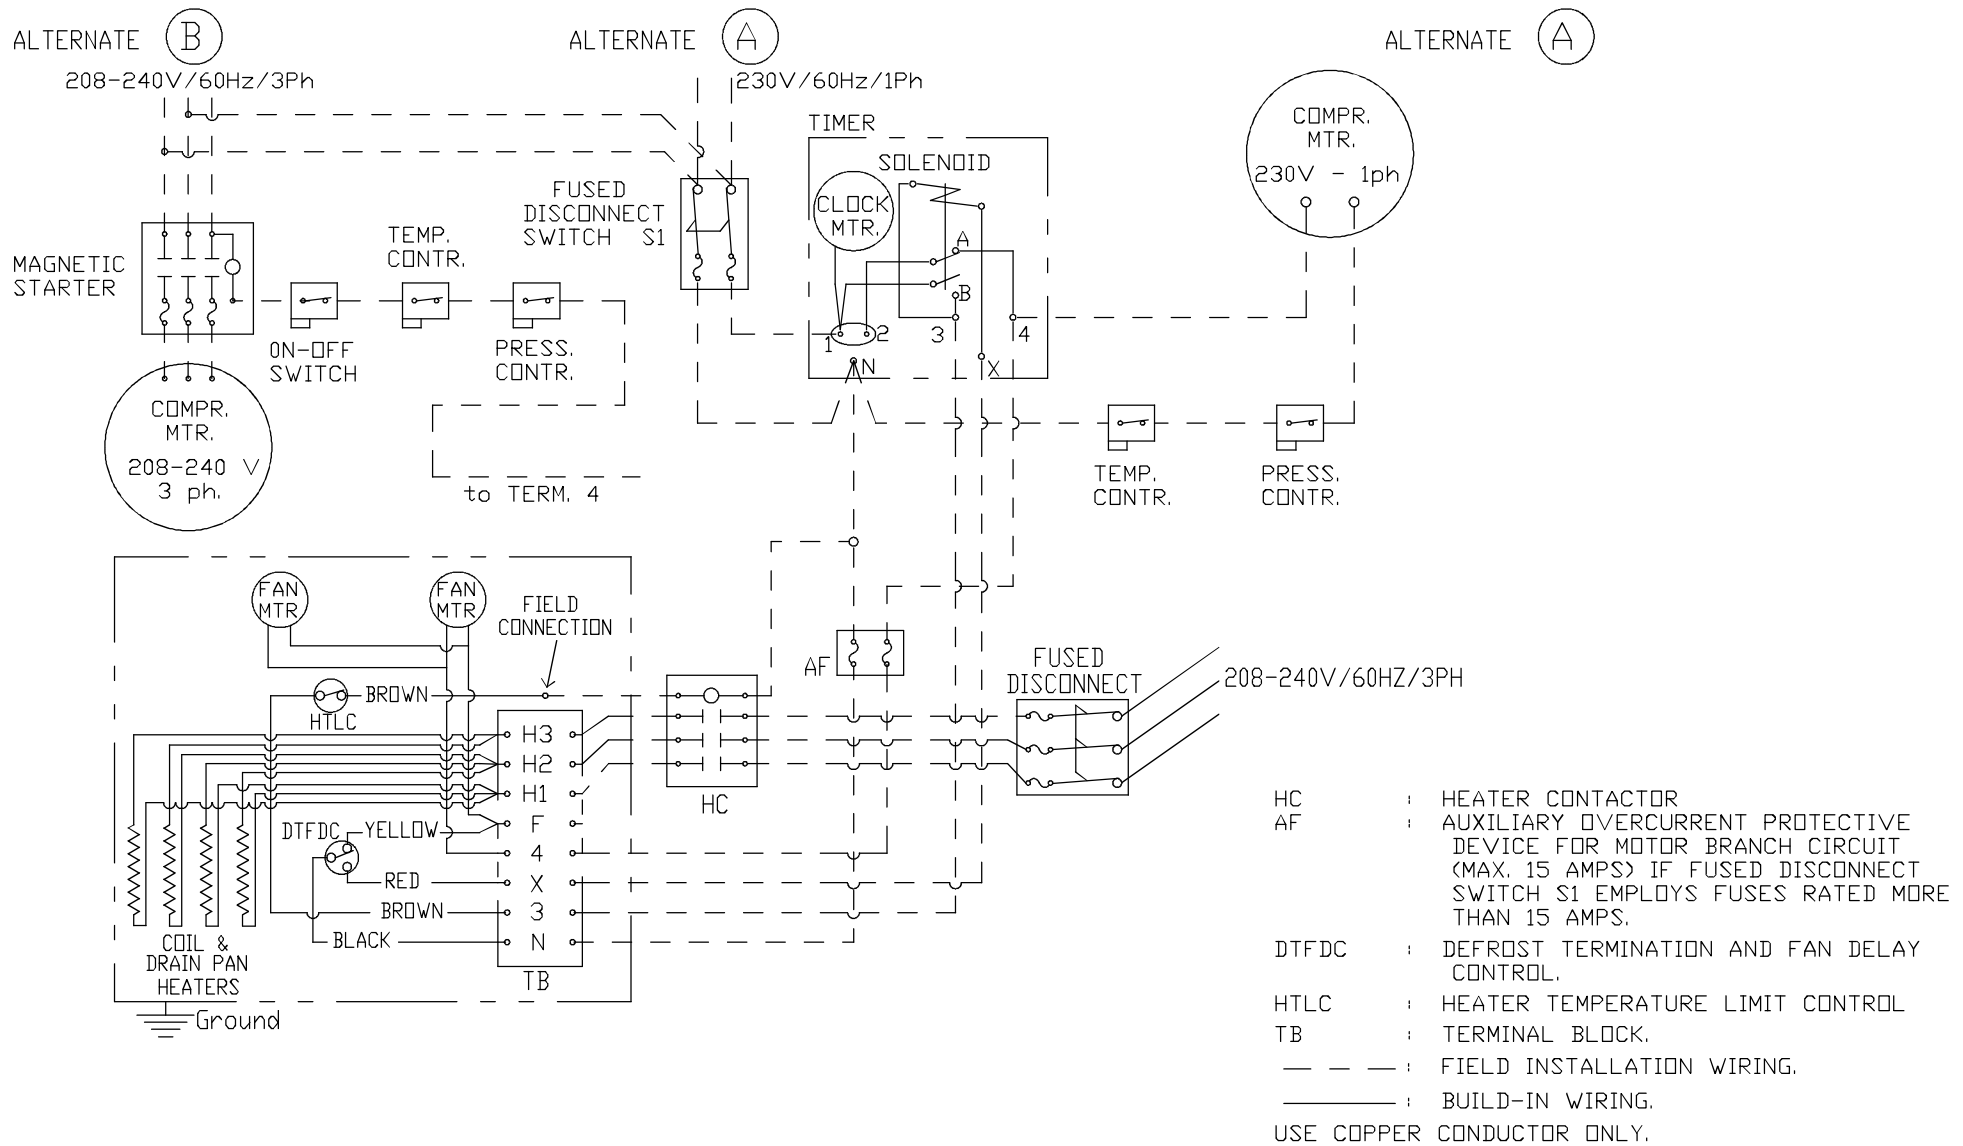

PEERLESS OF AMERICA, INC.
EFFINGHAM, IL 62401

SINGLE UNIT WIRING DIAGRAM - PLP-E SERIES.

480V/60HZ SYSTEM

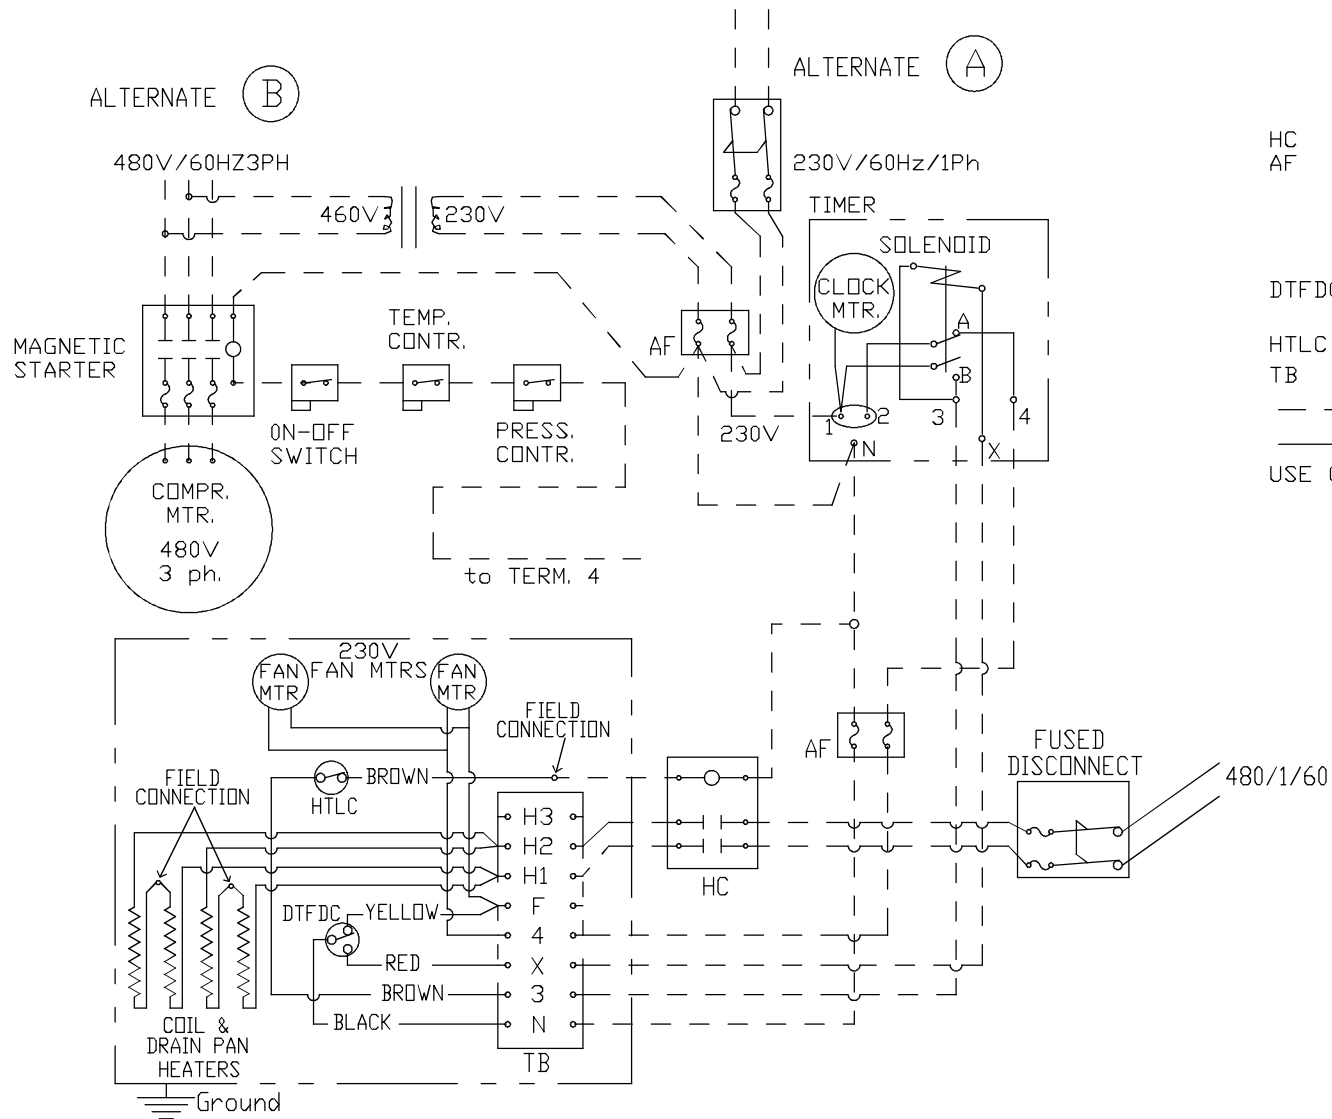

- HC : HEATER CONTACTOR
- AF : AUXILIARY OVERCURRENT PROTECTIVE DEVICE FOR MOTOR BRANCH CIRCUIT (MAX. 15 AMPS) IF FUSED DISCONNECT SWITCH S1 EMPLOYS FUSES RATED MORE THAN 15 AMPS.
- DTFDC : DEFROST TERMINATION AND FAN DELAY CONTROL.
- HTLC : HEATER TEMPERATURE LIMIT CONTROL
- TB : TERMINAL BLOCK.
- - - : FIELD INSTALLATION WIRING.
- : BUILD-IN WIRING.
- USE COPPER CONDUCTOR ONLY.

PEERLESS OF AMERICA, INC.
EFFINGHAM, IL 62401